

FEIDU FWT-200, 650'/200m(LOS) HDMI Wireless Video Transmitter and Receiver Set, Supports Up to 650'/200m Range Line of Sight, up to 1080p60 Resolution, DFS Function, Battery Quick Release Design, HDMI Loop Out, Zero-Delay, Integrated L Series Battery Plate, Come with 2 HDMI Cables, 2 Shoe Adapters, 1 Carry Bag



FEIDU FWT-200 HDMI Wireless Transmitter

Whether you're shooting a wedding, an indie film, or a television commercial, With the FEIDU FWT-200 HDMI Wireless Transmitter and Receiver you can transmit up to 1080p@60fps HDMI video signals up to 650'/200m with zero latency. 984'/300m can be reached in extreme conditions such as outdoor with no interference

The transmitter unit itself can be secured to a camera or other HDMI video source via built-in 1/4"-20 threaded holes. The included antennas provide a powerful signal that can travel up to 650'/200m line of sight. Video Loop Out function is also available on the Transmitter

Two shoe Adapters are included for attaching to cameras without 1/4"-20 threads. For convenience, two standard HDMI cables are included so you can plug in right out of the box. Both Transmitter and Receiver can be powered by external Micro USB 5V (Power Bank), DC 7-25V input and using the F970, F750 and F550 battery which is compatible with the integrated L Series battery plate.

FEIDU have a Battery Quick Release Design, which enables you to change a battery in less a second; F970, F750, and F550 battery and Micro USB 5V (Power Bank) can be used together in limited time for convenient battery exchange without signal drop off


The transmitter supports up to four receivers and built-in AES 128 encryption protects your video from prying eyes, while noise rejection helps keep your video clean even when working in 5 GHz signals.

Highlights

1. Transmits up to 650'/200m Line of Sight, 984'/300m can be reached in extreme conditions such as outdoor no interference
2. Supports up to 1080p60 Resolution, 1080P@60/50/30/25, 720P/480P, progressive scan only*
3. HDMI Input and Output, HDMI Loop Out
4. Zero Delay
5. DFS Function (Dynamic Frequency Selection)
6. Multiple Power Resource, Micro USB 5V (Power Bank), DC 7-25V or F970, F750 and F550 battery;
7. Uninterruptible Power Supply when Changing Batteries with Micro USB Plugged in
8. Battery Quick Release Design
9. 4 x Antennas total
10. AES128 Encryption
11. Transmits to up to 4 Receivers
12. Small size and compact body. Convenient for you to carry with carry-bag
13. Come with 2 HDMI Cables, 2 Shoe Amount, 1 Carry Bag

***Progressive scan is supported, while the interlaced scan is not supported currently**

Transmits up to 650'/200m Line of Sight, 984'/300m can be reached in extreme conditions such as outdoor no interference

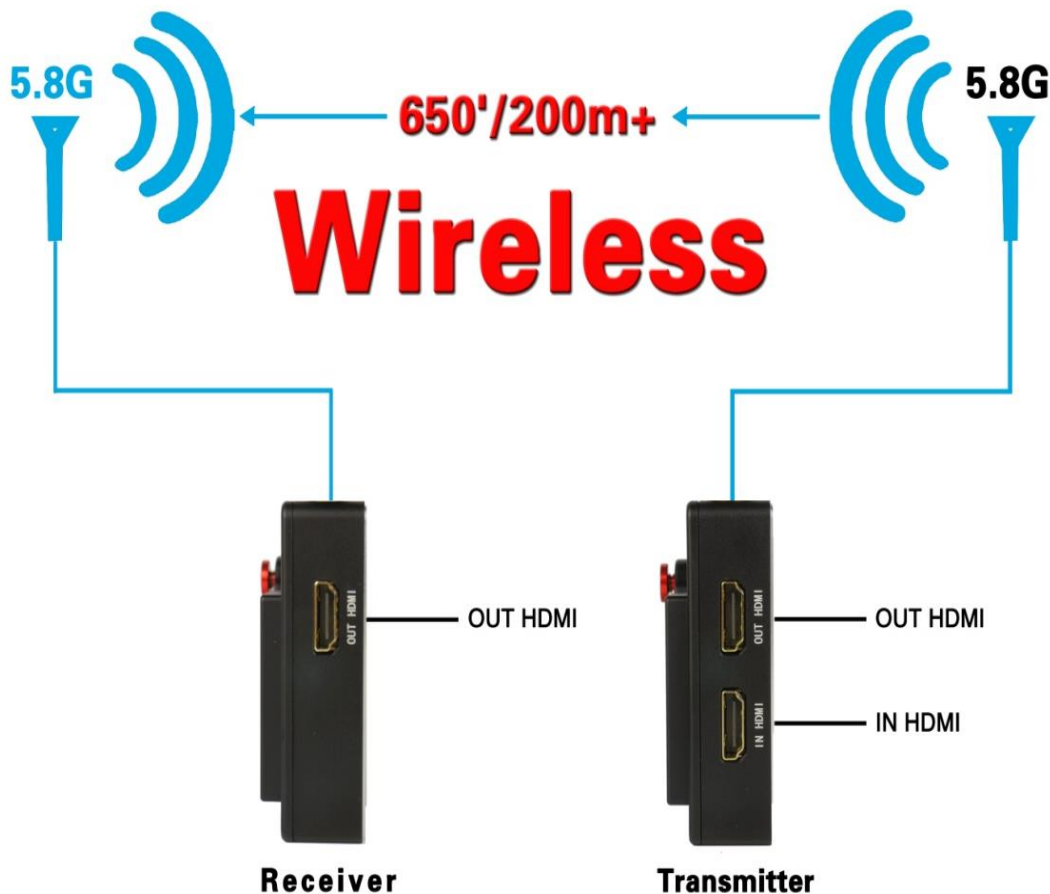


Supports up to 1080p60 Resolution, 1080P@60/50/30/25, 720P/480P, progressive scan only*



Low Latency


Real-time transmission

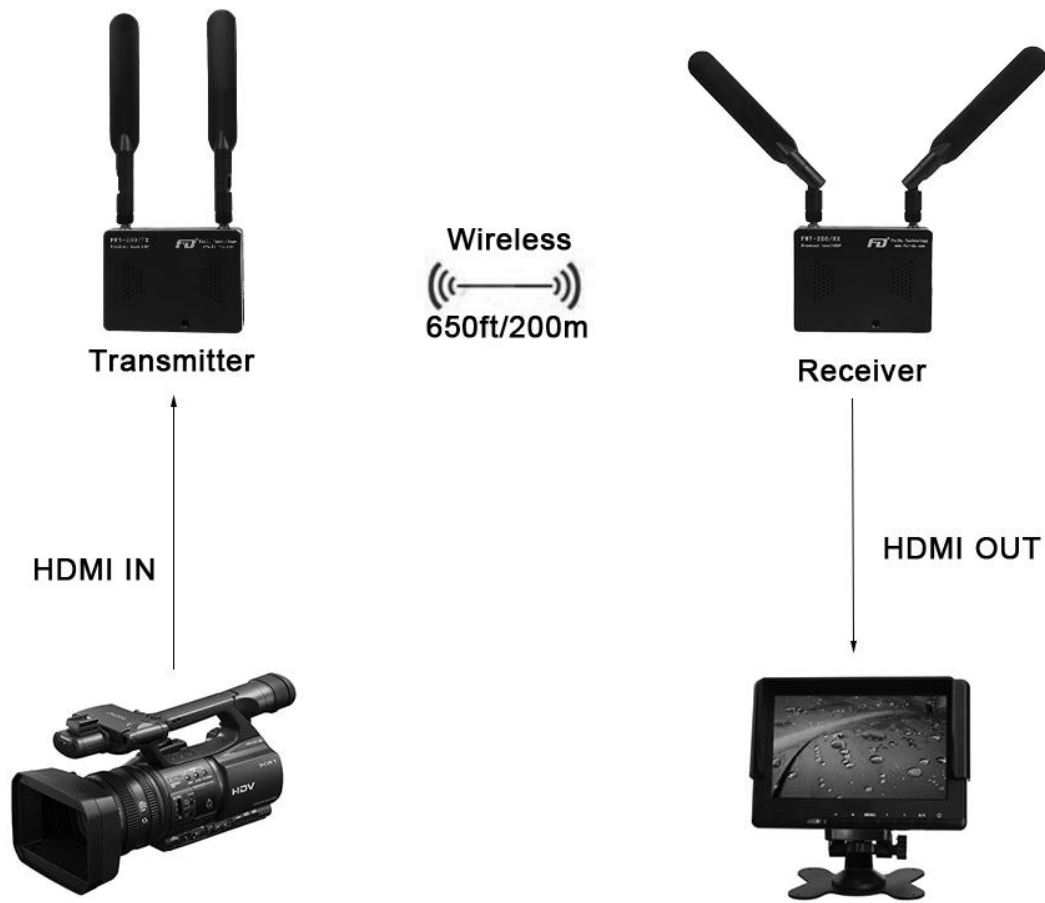

Dynamic Frequency Selection (DFS) Function, detecting radar signals that must be protected against interference from 5GHz radios by dynamically switching the operating frequency of the 5GHz radio to one that does not interfere with radar



Noise Rejection,

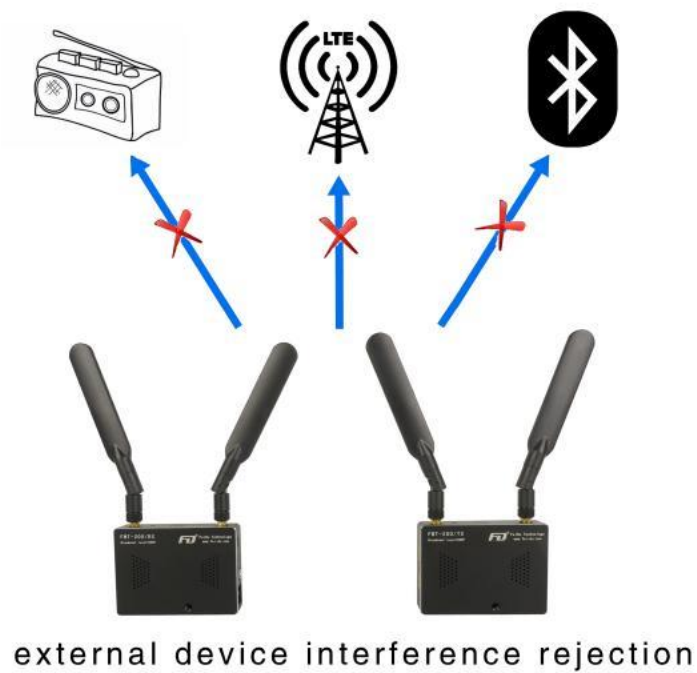


AES128 Encryption



Multiple Power Resource, Micro USB 5V (Power Bank), DC 7-25V or F970, F750 and F550 battery;



Uninterruptible Power Supply when Changing Batteries with Micro USB Plugged in, F970, F750, and F550 battery and Micro USB 5V (Power Bank) can be used together in limited time for convenient battery exchange without signal drop off

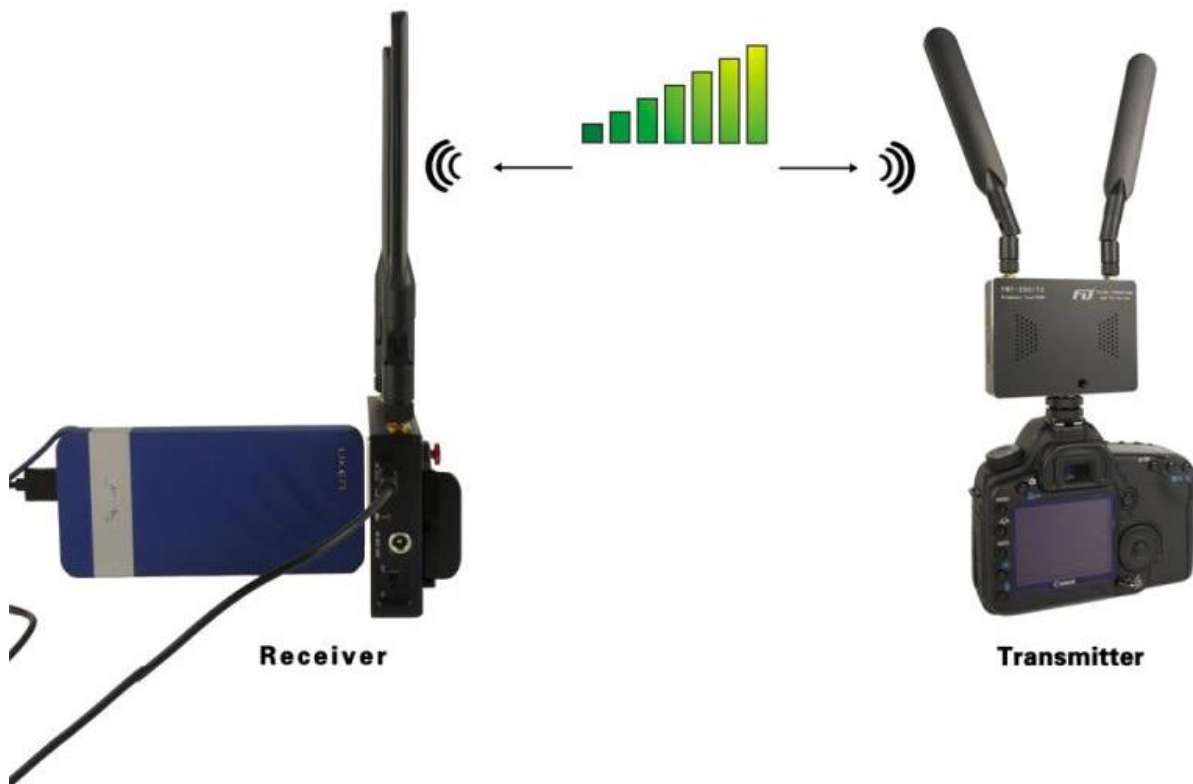

battery and Power Bank can be used together in short time
convenient battery exchange without signal drop off

HDMI Input and Output, HDMI Loop Through



4 x Antennas total



Battery Quick Release Design



Two shoe Adapters are included for attaching to cameras without 1/4"-20 threads



What's in the Box

1. FEIDU FWT-200 HDMI Wireless Video Transmitter
2. FEIDU FWT-200 HDMI Wireless Video Receiver
3. 4 Antennas
4. 2 HDMI A Male to A Male Cables 0.5m/1.64'
5. 2 Hot Shoe Adapters



transmitter*1



receiver*1



5GHZ Antennas*4



HDMI wires*2




hot shoe adaptor*2



package size: 340(L)*250(W)*70mm(H)
Weight: 1.7KG



Reserve position for Battery and Battery charger inside the carry bag

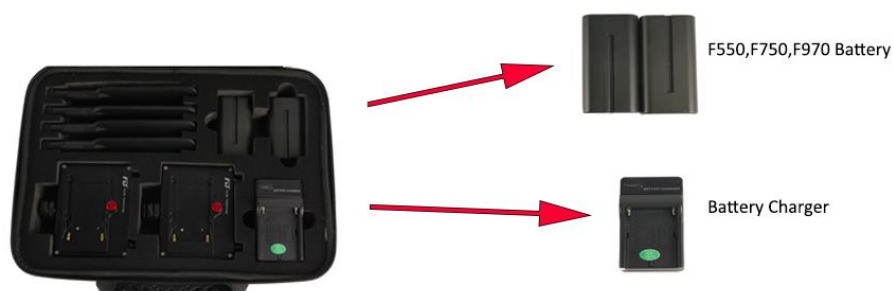

Convenient for you to carry the whole package with all necessary accessories

*Battery and Charger are not included in the package

Product Dimension & Weight

100*75*28mm / 3.94*2.95*1.10inch (W*D*H), Antenna is not included

205g / 7.23oz / 0.45lbs

Package Dimension & Weight

Package size: 340mm *250mm*70mm(L*W*H), 13.39*9.84*2.76inch(L*W*H)

Weight: 1.7kg/3.74lb

EAN: 6971607530013; **UPC:** 850002358094

Carton Size: 5pcs/carton

Carton Dimension & Weight

355*350*270mm(L*W*H) 13.98*13.78*10.63 inch (L*W*H)

Weight:8.6KG/18.92lb