

LILLIPUT®

FS5

5.4" 1920×1200 Full HD monitor with silicone case




5.4" HDMI 2.0 & 3G-SDI On-Camera Monitor

On-Camera monitor for professional camcorder & DSLR
Application for taking photos & making movies.



Excellent Display

The 5.4" 16:10 LTPS panel with 1920x1200 full HD resolution, 1100:1 high contrast, 160° wide viewing angles, 600cd/m² high brightness, 88% DCI-P3 color space, which offers outstanding viewing experience.

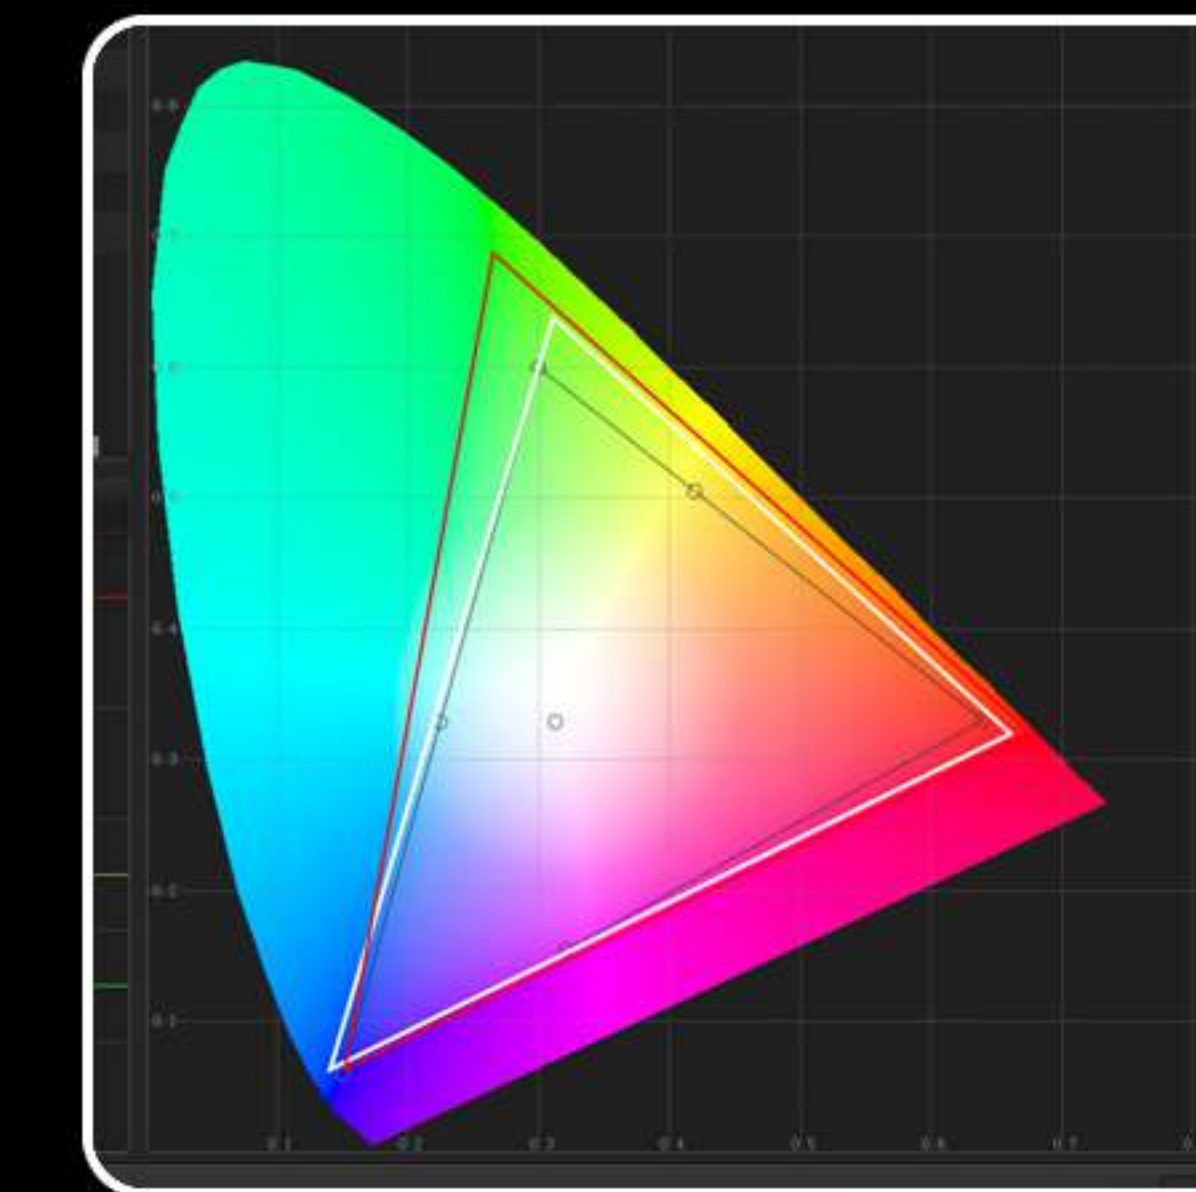

Color Space

Color space affects the richness of picture's color, the better color space, the better color reproduction.

- DCI-P3
- Rec.709
- FS5



HDR

When HDR is activated, the display reproduces a greater dynamic of luminosity, allowing lighter and darker details to be displayed more clearly. Effectively enhancing the overall picture quality. Support ST 2084 300 / 1000 / 10000 and HLG.



HDR OFF

HDR ON

3D-LUT

3D-LUT is a table for quickly looking up and output specific color data. By loading different 3D-LUT tables, it can quickly recombine color tone to form different color styles. Built-in 3D-LUT, featuring 17 default logs and 6 user logs.





3G-SDI INPUT / OUTPUT

SDI supports up to 1920×1080 60p/50p/30p/25p/24p(3G-SDI signal), and downward compatible with HD-SDI and SD-SDI.



3G-SDI signal can loop output to the other monitor or device when 3G-SDI signal input to this model.

4K 60HZ HDMI 2.0

HDMI 2.0 supports up to 4096×2160 60p/50p/30p/25p/24p and 3840×2160 60p/50p/30p/25p/24p.





Some commercially DSLR Cameras (GH-5, R5...) have been upgraded to HDMI 4K 60Hz video output. It means this monitor is compatible with the best output video formats of DSLR cameras on the market.




Camera Auxiliary Functions


Provides plenty of auxiliary functions for taking photos and making movies, such as peaking, false color and audio level meter.

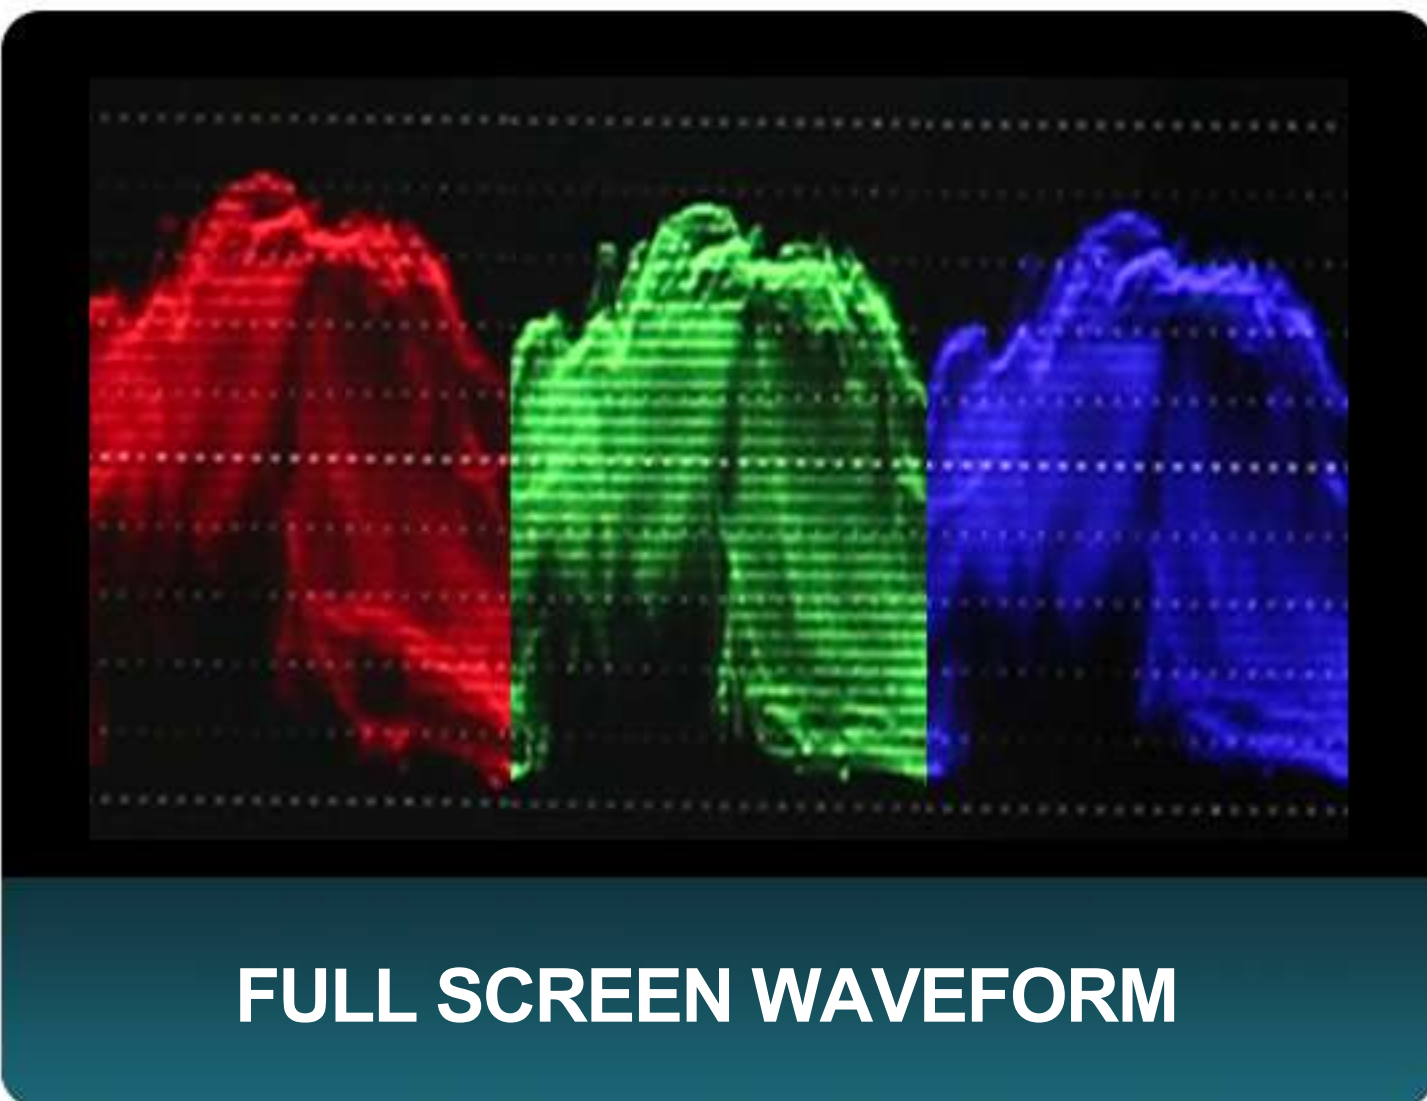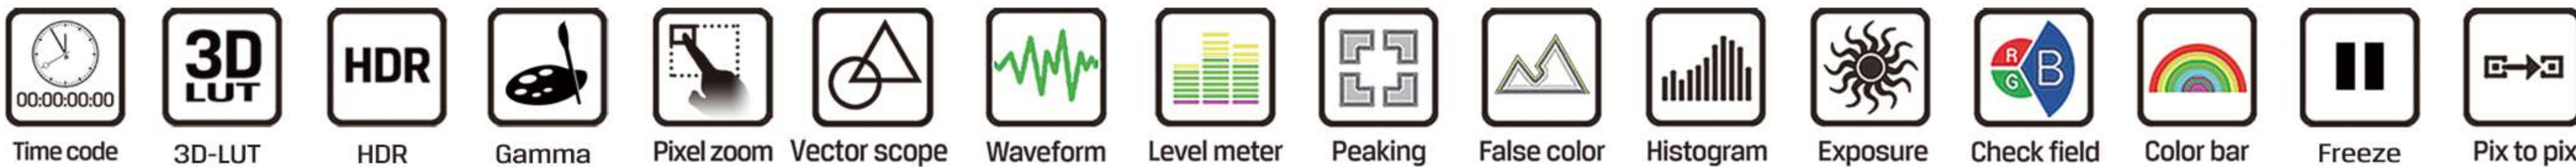

FULL SCREEN WAVEFORM

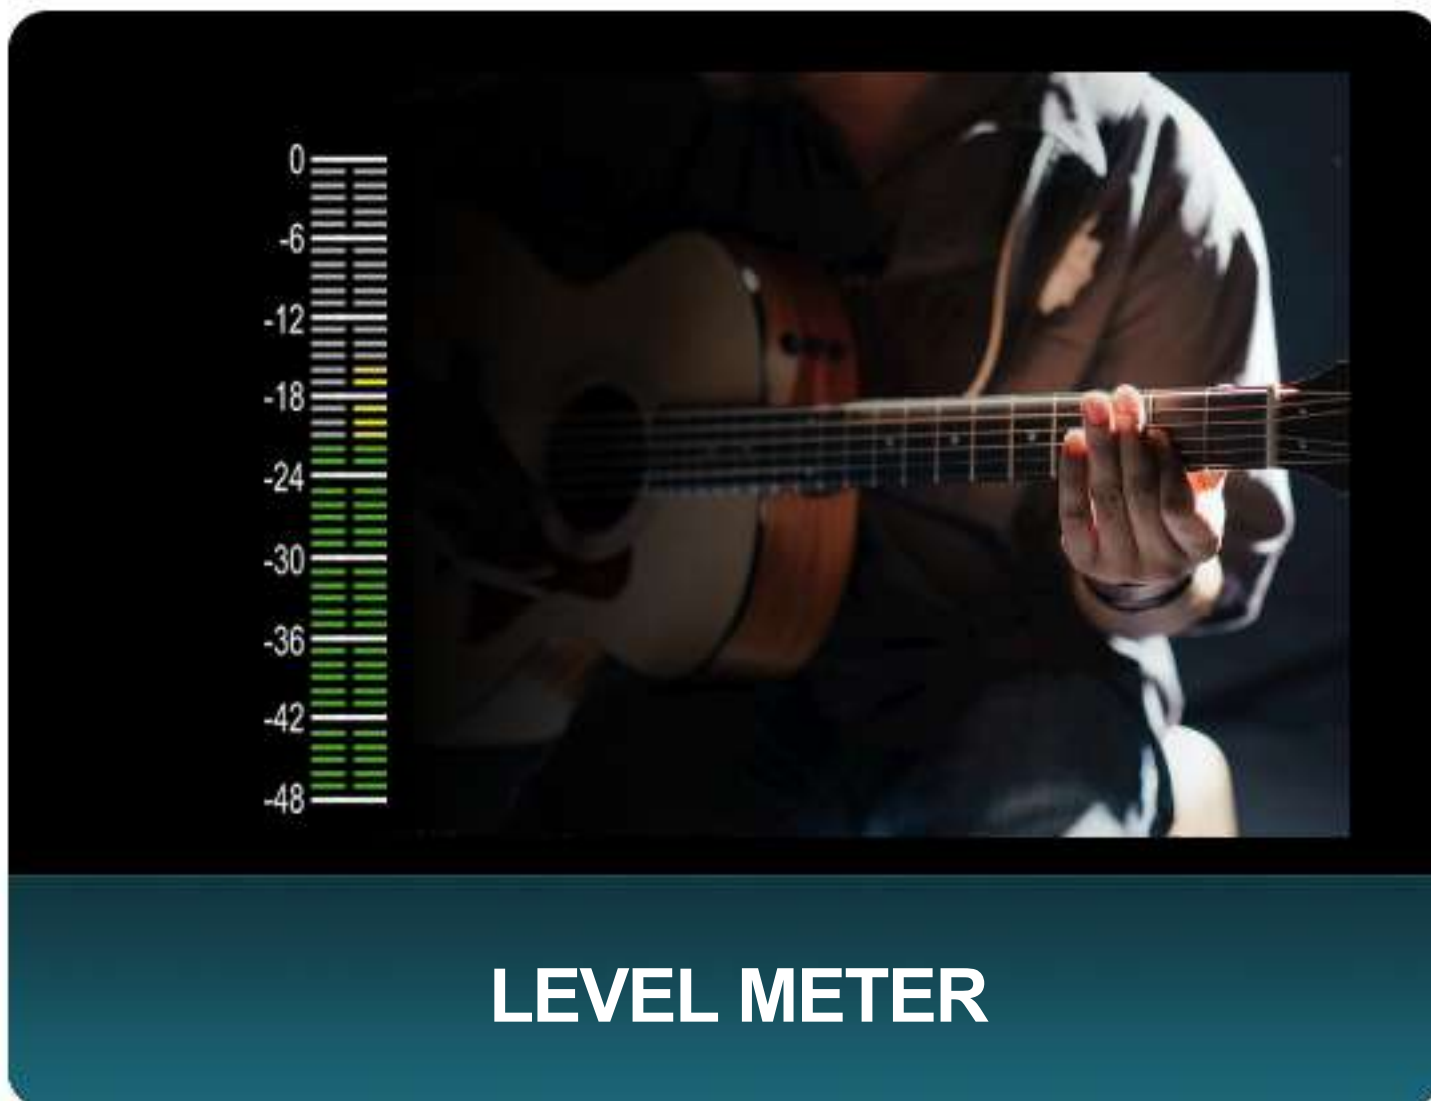

LEVEL METER

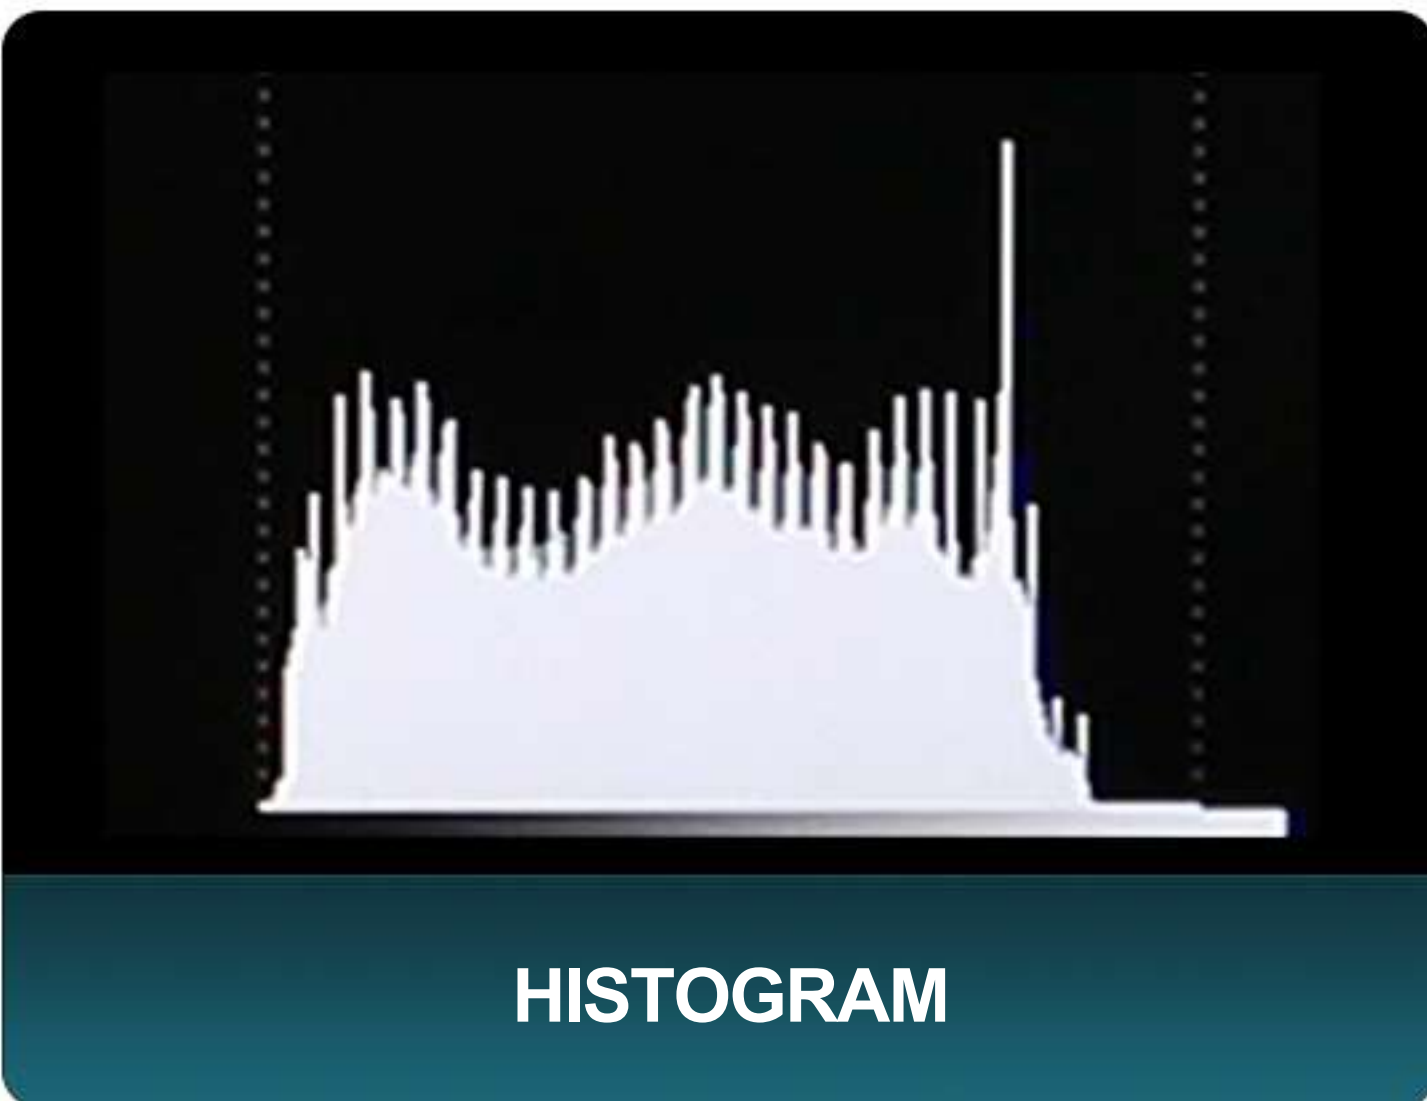

HISTOGRAM



FALSE COLOR



PEAKING FOCUS



EXPOSURE



CHECK FIELD



ASPECT RATIO



MAKRERS



SPECIFICATIONS

DISPLAY	Panel	5.4" LTPS
	Physical Resolution	1920×1200
	Aspect Ratio	16:10
	Brightness	600cd/m²
INPUT	Contrast	1100:1
	Viewing Angle	160°/ 160° (H/V)
	HDR	ST 2084 300/1000/10000 / HLG
	Supported Log Formats	Slog2 / Slog3, Arrilog, Clog, Jlog, Vlog, Nlog or User...
OUTPUT	LUT Support	3D-LUT (.cube format)
	3G-SDI	1
	HDMI	1 (HDMI 2.0, supports up to 4K 60Hz)
	3G-SDI	1
FORMATS	HDMI	1 (HDMI 2.0, supports up to 4K 60Hz)
	SDI	1080p 60/50/30/25/24, 1080pSF 30/25/24, 1080i 60/50, 720p 60/50...
	HDMI	2160p 60/50/30/25/24, 1080p 60/50/30/25/24, 1080i 60/50, 720p 60/50...
	SDI	1080p 60/50/30/25/24, 1080pSF 30/25/24, 1080i 60/50, 720p 60/50...
AUDIO	Speaker	1
	Ear Phone Slot	1
	Current	0.75A (12V)
	Input Voltage	DC 7-24V
POWER	Battery Plate	NP-F / LP-E6
	Power Consumption	≤9W
	Operating Temperature	-20℃~50℃
	Storage Temperature	-30℃~70℃
ENVIRONMENT	Dimension(LWD)	154.5×90×20mm
	Weight	295g
DIMENSION		

ACCESSORIES

STANDARD




12V 2A DC Power Adapter



0.8M HDMI A-C Cable



Battery Plate

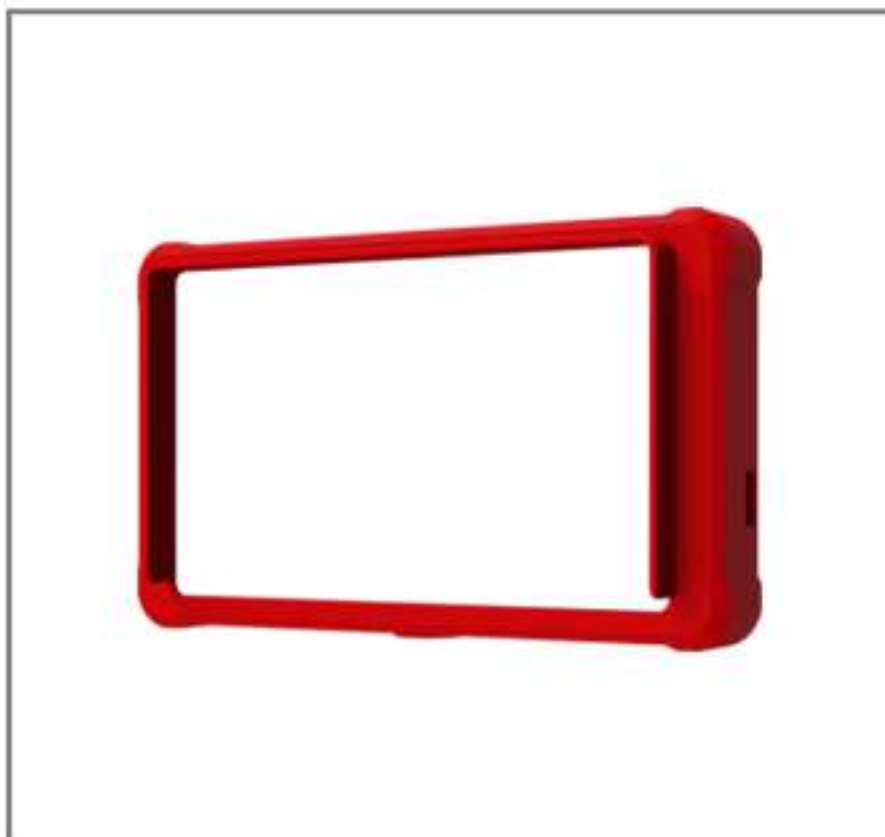

Silicone Case



Sunshade



Hot Shoe Mount

