



MODEL NO.: **BM150-4K** **4K** 3840×2160


15.6" CARRY-ON 4K BROADCAST DIRECTOR MONITOR

Specific Monitor by LILLIPUT with Broadcast Quality for Full HD Camcorder Application for CCTV Monitoring & Making Movies



4K 4K Ultra-HD resolution

Ultra HD 4K screens contain 8.3 million pixels (3840x2160), so the resolution is four times that of Full HD, and making the innovative 4K screen the ultimate in cinematic displays.

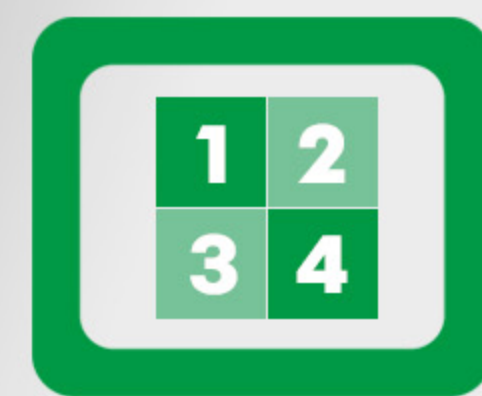

Quad view

Support 4 views splitted from 4 different input signals simultaneously, such as SDI, HDMI, DVI and VGA. It's easy to watch images come from 4 specified places or angles on screen at the same time. HDMI 2.0 supports 4K 60Hz, HDMI 1.4 supports 4K 30Hz.




Image flip

It offers great convenience for users to place the monitor with various mounting methods under different conditions. Users can view the monitor normally no matter what mounting angles.



4 user-definable buttons

This unit provides F1-F4 user-definable buttons, which can be customized as shortcut function, such as peaking, underscan, overscan, checkfield, image flip, etc.

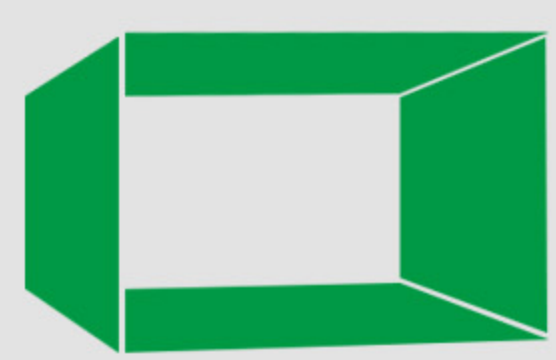


Carry-on suitcase

The suitcase improves the monitor robustness & portability, also speeds up heat radiating. It makes monitor more stability and reliability. Specially suitable for live shooting and post production.



Metal housing

A good protection from damage with all aluminum mainbody, to extend the life time of your monitor.

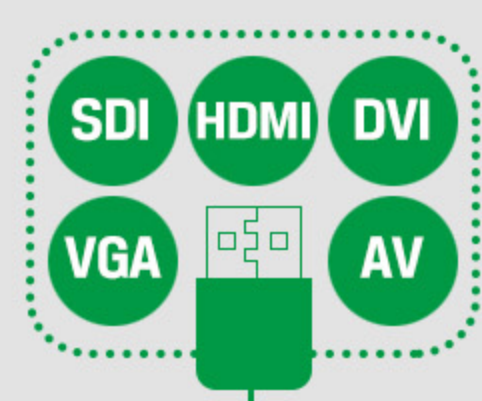

Rich interfaces

The monitor comes with 3G-SDI, HDMI, VGA, DVI & Audio interfaces. Multiple inputs meet the best need of various professional display solutions.




Wireless HDMI (optional)

With Wireless HDMI (WHDI) technology, which has a 50-meter transmission distance, supports up to 1080p 60Hz. One transmitter can work with one or more receivers.



6U Rack Mount Intelligent SDI Monitoring

It has a various of mounting methods for broadcast, on-site monitoring and live broadcast van, etc. As well as setup a video wall of rack monitors in control room and see all the scenes. A 6U rack for a customized monitoring solution also can be supported for viewing from different angles and images displays.

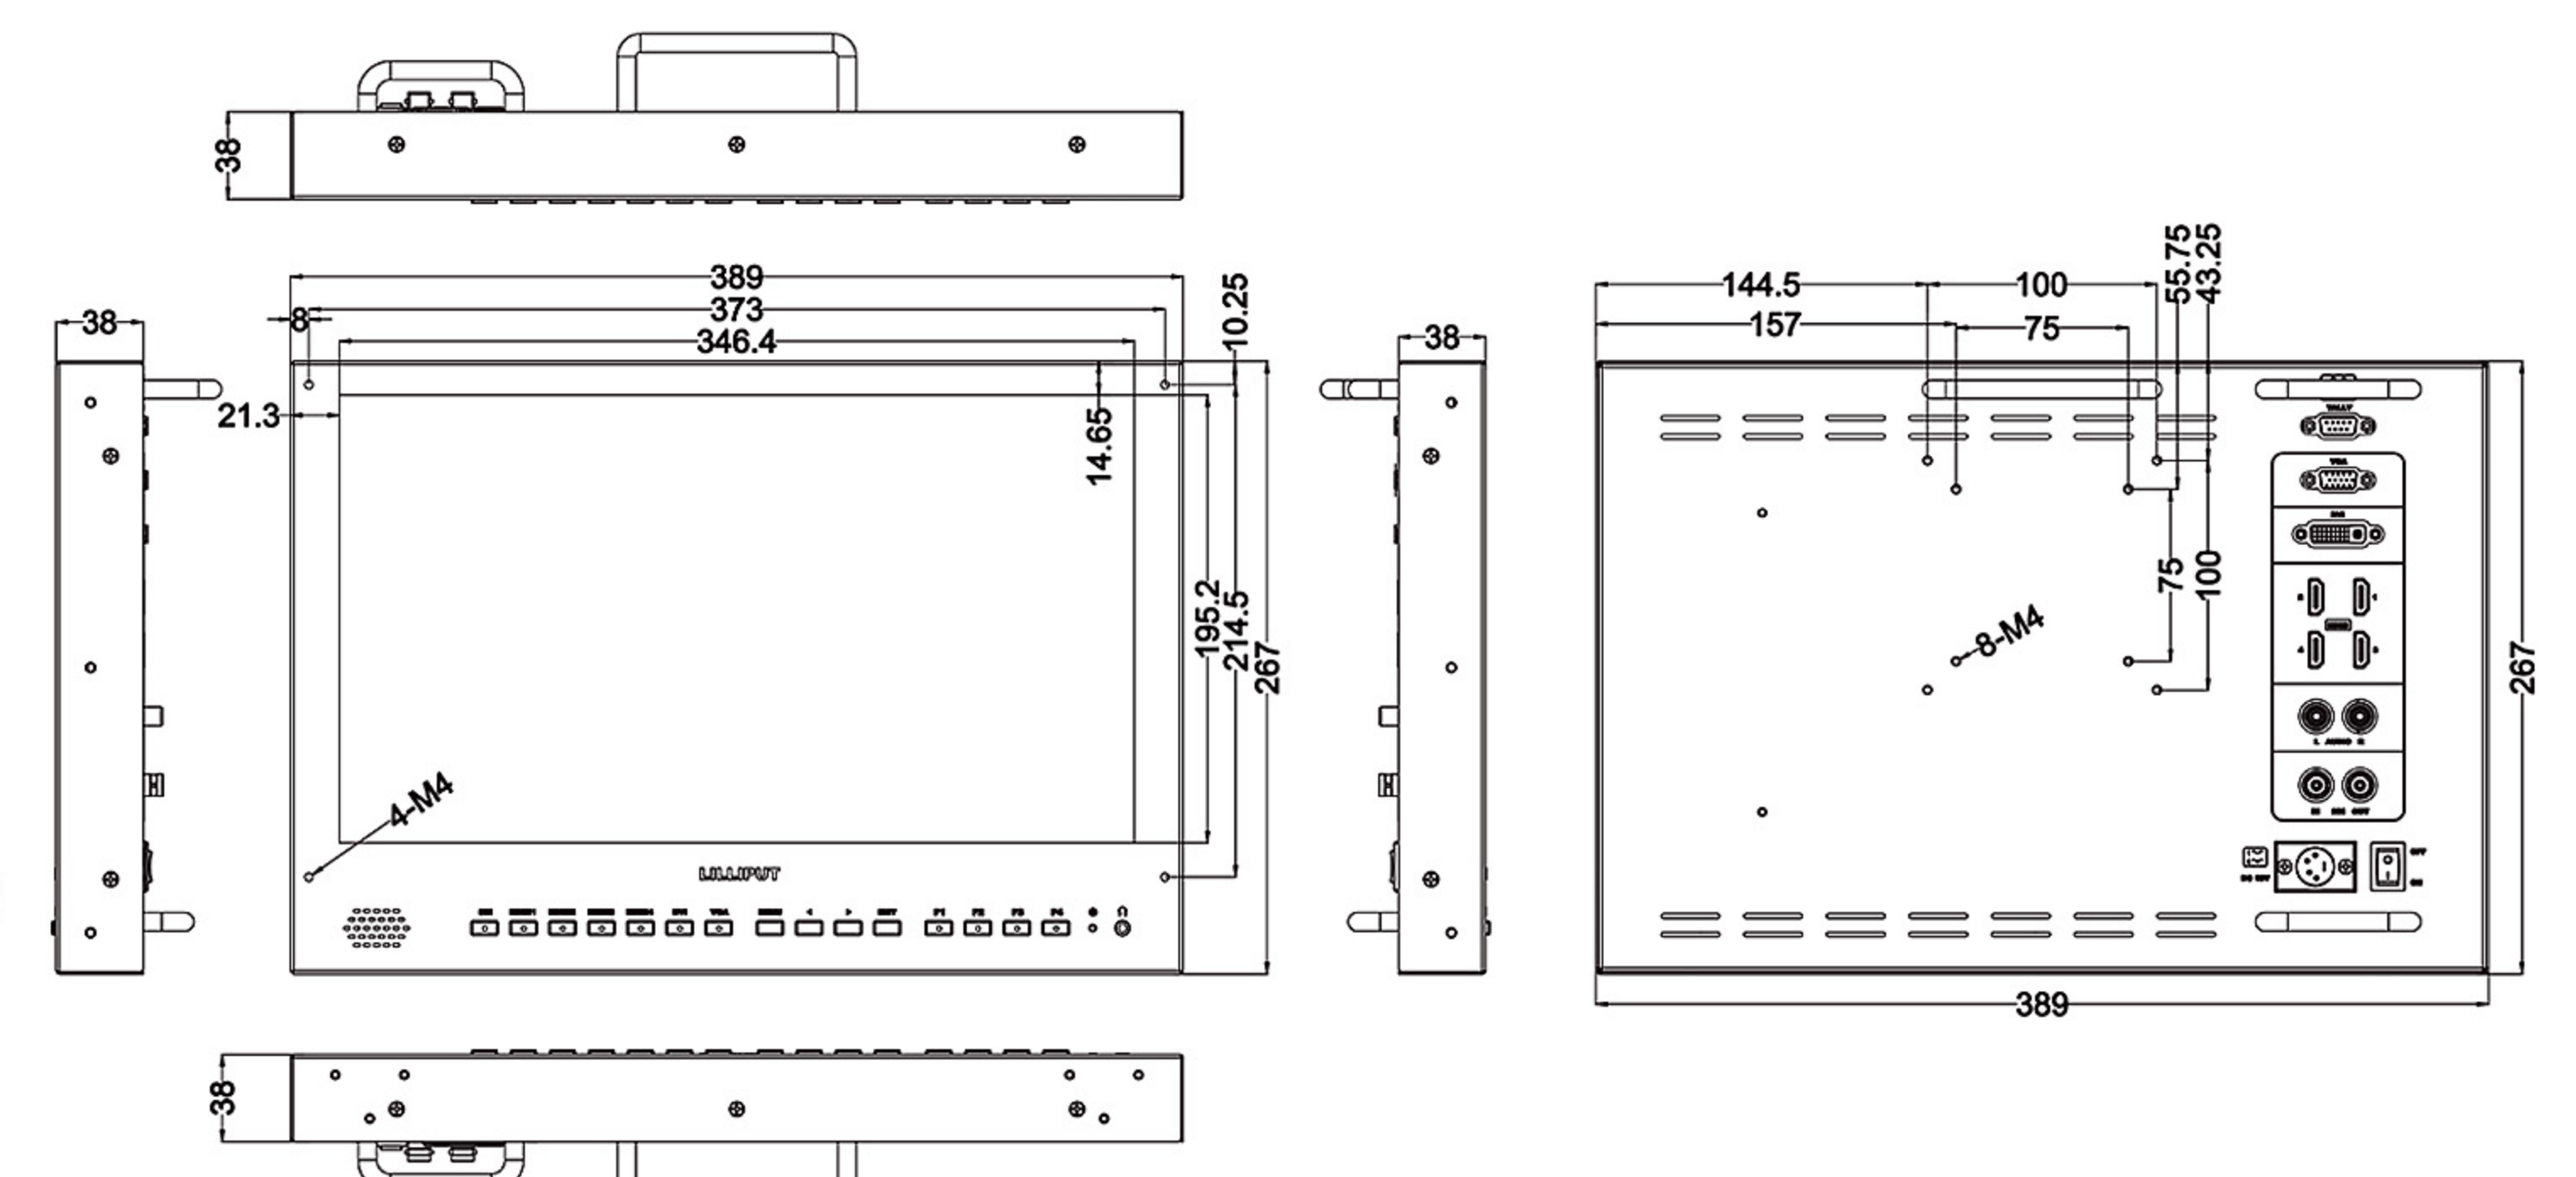

SPECIFICATIONS / ACCESSORIES

DISPLAY	Panel	15.6" 8 bit	SMPT-125M 480i(59.94) 1080i(60/59.94/50) 1080p(30/29.97/25/24/24sF/23.98/23.98sF)
	Physical Resolution	3840x2160	
	Aspect Ratio	16:9	
	Brightness	330cd/m ²	
INPUT	Contrast	1000:1	SDI Format SMPT-292M 1080p(30/29.97/25/24/24sF/23.98/23.98sF) SMPT-296M 720p(60/59.94/50/30/29/25/24/23.98) 720p(60/59.94/50) SMPT-372M 1080i(29.97/25/24/23.98) 1080p(60/59.94/50/30/29.97/25/24/23.98)
	Viewing Angle	176° / 176° (H/V)	
	3G-SDI	1	
	Wireless HDMI	1 (optional)	
OUTPUT	HDMI	HDMI 2.0x1 (support 4K 60Hz) HDMI 1.4x3 (support 4K 30Hz)	SMPT-425M-AV 1080p(60/59.94/50) -Level A & Level B 720p(60/59.94/50/30/29.97/25/24/23.98) -Level B 2x 1080i(60/59.94/50) ITU-R BT.656 576i(50)
	DVI	1	
	VGA	1	
	Audio	2 (L/R)	
AUDIO	Tally	1	HDMI Format 4K, 1080p, 1080i, 1035i, 720p, 576p, 576i, 480p, 486i
	3G-SDI	1	
	Speaker	2	
POWER	Ear Phone Slot	1	ACCESSORIES 1. Folding sun shade cover 1 piece 2. Carry-on suitcase 1 piece 3. 15V DC adapter 1 piece 4. Adapter fixing belt 2 pieces 5. Battery plate bracket 1 piece 6. Base bracket 1 pair 7. V-mount/Anton Bauer mount power cable 1 piece 8. V-mount or Anton Bauer mount 1 piece 9. TALLY connector (in bulk) 1 piece 10. Manual 1 copy 11. WHDI accessories (optional) 1 pair 12. Acrylic screen protector (optional) 1 piece
	Current	1A (15V)	
	Input Voltage	DC 12-24V (XLR)	
ENVIRONMENT	Battery Plate	V-mount/ Anton Bauer mount	
	Power Consumption	≤15W	
DIMENSION	Operating Temperature	0°C~60°C	
	Storage Temperature	-20°C~60°C	
	Dimension (LWD)	389×267×38mm / 524×305×170mm(with case)	
	Weight	3.4kg/ 12kg(with case)	

Note: Due to constant effort to improve products and product features, specifications may change without notice.

