

VariZoom

VZ-RC100 / VZRF100

Thank you for purchasing the **VariZoom VZ-R Series** remote variable-speed zoom controller for professional video lenses. We think you're going to like it a lot. Here are some important guidelines for safe and effective operation...

Connection: Plug the 8-pin cable connector into the lens servo jack located under the lens grip handle (**FIG. 1**). Be sure to match the pin connections carefully. When properly connected, the cable should be firmly seated within the jack. Thread the connector sleeve onto the jack and tighten by hand.

FIND THE SWITCH MARKED "ZOOM – S / M" AND MAKE SURE IT IS SET TO "S" (1a) – THIS SWITCH TOGGLES THE LENS BETWEEN **SERVO** and **MANUAL** MODES (YOU WANT IT SET TO **SERVO** MODE)

WARNING: ABUSE OF THE 8-PIN CONNECTOR MAY RESULT IN DAMAGE NOT COVERED BY THE WARRANTY. TREAT THE CONNECTOR GENTLY WHEN CONNECTING AND DISCONNECTING IT FROM THE LENS.

Power: The **VZ-R Series** controller does not require batteries or external power. Just plug the cable into the lens servo jack, and it's ready to use.


Tripod / Jib Mount: Your **VZ-R Series** controller has a clamping system for attaching to your tripod handle, shoulder support or crane/jib. (Extension cables are available in 10, 20, or 50 ft lengths).

Recording: Press the red "R" button to start and stop recording.

Video Return: "A" button allows you to see what is being recorded through the viewfinder.

Zoom: Your **VZ-R Series** controller features a variable rocker so that you can go from the slowest crawl to the fastest speed attainable by your lens. The more you press the rocker, the faster the lens will zoom.

If your controller causes the lens to zoom on its own, you may need to calibrate the zoom rocker. To do so, first connect the controller to the lens normally. On the underside of the rocker you will see a small brass hex socket screw, and on the flat end of the rocker you will see a hole with a slotted adjustment knob inside. Loosen the brass hex socket screw with a 5/64" hex key and turn the slotted adjustment knob (using a flat tip screwdriver) from left to right until the lens stops zooming, then tighten the brass screw.

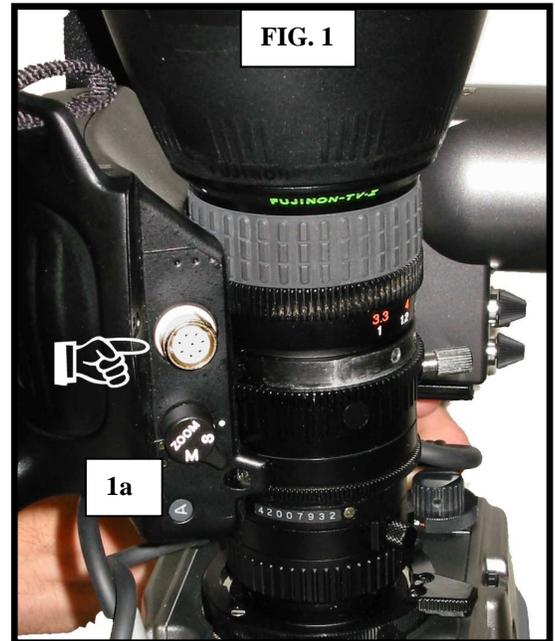

Warranty Warning! Do not open your control device. If you need service, call and we'll be happy to set up a service return. All products have a 2-year parts and labor warranty. Please save your receipt and feel free to send us your comments and suggestions. Thanks!

-- please keep this document for your records & reference --

VariZoom Lens Controls: 888-826-3399 / 512-219-7722
or visit us at www.varizoom.com